




Woodworking machinery and tools



2016 / 2017

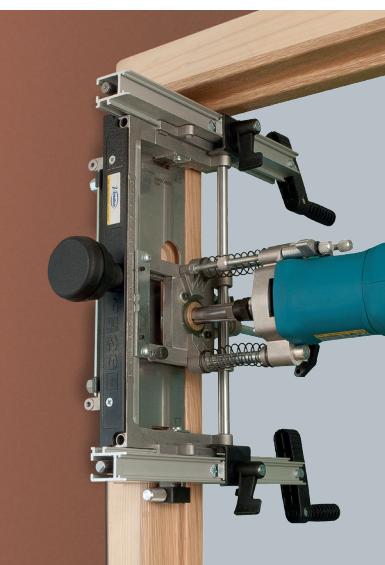

[www.ney.co.uk](http://www.ney.co.uk)

Machines for Parquet Industry

Professional solutions

Video



## RZ270S | Trimming machine

Specially designed for cutting doors, door frames, base boards and skirtings, it is ideal for installers of parquet or such other floor coverings as carpets, ceramic tiles, etc. Equipped with a powerful motor it provides a clean and precise cut easily and quickly. The cutting height and depth are adjustable by means of its milimetric gauges. Its cutting depth allows to cut the doors at once.

Includes dust collection nozzle and pipe for connection to an external dust collector.



It cuts door frames without to disassemble the buttstraps, providing a precise and clean cut.



Its cutting depth allows it to cut the doors at once without splintering.



High fiability when cutting base-boards or skirtings.



Thanks to the possibility to take away the front part of the head it is possible to arrive to the corner when cutting the skirtings.



Cutting a shadow joint.



### Standard equipment

Carbide saw blade Z 24 Ø 165 mm for cutting doors and skirtings (ref. 7040314), dust collection pipe 2.25 m long, carrying case and service keys.



### Optional saw blades

7040193 Diamond disc (Ø 150), for cutting bricks, concrete, granite, ceramics and stoneware  
7040316 Saw blade for cutting metals (Ø 165, Z 30), ideal to cut the metal sheets on the armored dors

### Specifications

Input power	1,300 W
Cutting depth	0-47 mm
Minimum cutting height	8 mm
Maximum cutting height	35 mm
No-load speed	5,000/min
Weight	5.6 kg





## FR817T | Corner trimmer

Specially designed for trimming on the corners on the polishing of solid wood parquet or stairs. It allows to trim the corners, where the traditional parquet sanders cannot arrive, leaving them at same level than the rest of the floor. Machine equipped with frontal protector avoiding damages to the skirting or any other wall elements. Includes a dust collection nozzle for connecting to an external dust collector.



It allows to trim the corners, where the traditional sanders cannot arrive.



Thanks to its design it can accede easily to the corners.



Easy and quick adjustment of the height of the bit.



Equipped with front protector to avoid to damage the skirtings or any other element fixed on the wall.

Perfect finishing  
in less time



**Standard equipment**  
90° carbide bit, service keys  
and carrying case.



### Specifications

Input power	750 W
No-load speed	14,000 - 30,000/min
Weight	1.9 kg



www.virutex.es



Woodworking machinery and tools



# 2016 / 2017



## Professional solutions

NEY Ltd (Head Office)  
Stonebridge Trading Estate  
Sibree Road  
Coventry  
CV3 4FD

T: 024 7630 8100  
F: 024 7630 8101  
machines.info@ney.co.uk

NEY Ireland  
Unit 22 Blaris Industrial Estate  
Altona Road  
Lisburn  
BT27 5QB

T: 028 92 673 000  
F: 028 92 672 999  
ireland@ney.co.uk

NEY Scotland  
Block 2 Units 1-2-3,  
Bandeath Ind Est, Throsk  
Stirling,  
FK7 7NP

T: 01786 814 814  
F: 01786 814 812  
scotland@ney.co.uk

# www.ney.co.uk

A comprehensive approach to the Woodworking Industry